

Fig. 1

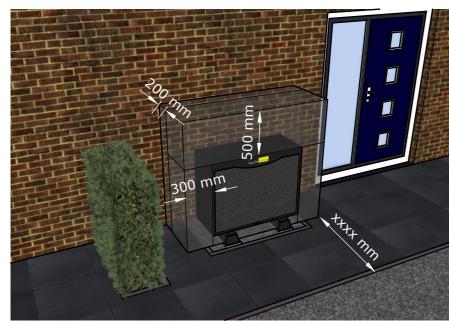


Fig. 2



ig. 3



Fig 4

POINTS OF ATTENTION:

Foundation:

- Install both foundation slabs, ensure vertically and horizontally level
- Material: Concrete or plastic/composite

Gravel Layer:

- Depth of gravel layer depends on the water permeability. Water must be able to flow freely into the soil layer. (Guideline: When emptying a large filled watering can, the gravel layer must not overflow.

General:

- The dimensions defined in fig 2 are the minimum requirement to for airflow.
- Due to efficiency of airflow and optimal absorption of noise, where possible, the front of the pump shouldn't be obstructed.

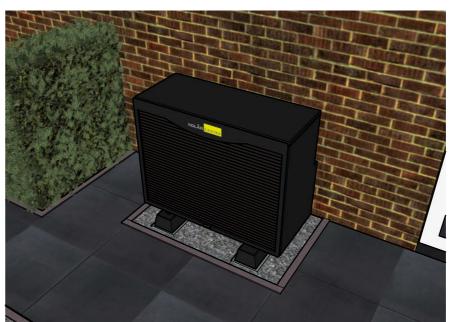


Fig. 5

0	ESCRIPTION:	DRAFTSTATUS:	DRAFTSMAN:	REVISIONNUMBER:			i
							ı
	AURORA II (14 kW) - Ground Level Preparation	DEF	HgbW	02			l
		CCALE		FORMAT:	DDAFTAH HAADED		i
	ROJECT:	SCALE:	DRAFT/REVISION DATE:	FORMAT:	DRAFTNUMBER:		i
							i
	Installation Preparation	N/A	06-04-2023	A3	AC-ALG-HP-23-009-EN		
L					1 1 2 1 1 2 2 1 1 2 2 2 1 1		

